

RMP84

miniature relays

version AC



version DC



NEW

- Cadmium - free contacts • Height 25,5 mm
- 5000 V / 8 mm reinforced insulation
- For PCB and plug-in sockets
- Accessories: sockets and modules
- AC and DC coils
- WT (mechanical indicator + lockable front test button)
- standard features of relays
- Recognitions, certifications, directives: RoHS,

Contact data

Number and type of contacts		2 CO
Contact material		AgNi
Rated / max. switching voltage	AC	250 V / 440 V
Min. switching voltage		12 V 10 mA
Rated load	AC1	8 A / 250 V AC
Min. switching current		10 mA 12 V
Max. inrush current		16 A 20 ms
Rated current		8 A
Max. breaking capacity	AC1	2 000 VA
Min. breaking capacity		0,12 W 10 mA / 12 V
Contact resistance		≤ 100 mΩ 1 A / 6 V DC
Max. operating frequency		
• at rated load	AC1	360 cycles/hour
• no load		18 000 cycles/hour

Coil data

Rated voltage	50 Hz AC	24 ... 230 V
	DC	12 ... 110 V
Must release voltage		AC: ≥ 0,15 U _n DC: ≥ 0,1 U _n
Operating range of supply voltage		see Tables 1, 2 and Fig. 3, 4
Rated power consumption	AC	0,75 VA ❶
	DC	0,4 ... 0,48 W ❶

Insulation according to PN-EN 60664-1

Insulation rated voltage		500 V AC
Rated surge voltage		4 000 V 1,2 / 50 μs
Overvoltage category		III
Insulation pollution degree		3
Insulation resistance		1000 MΩ 500 V DC
Dielectric strength		
• between coil and contacts		5 000 V AC type of insulation: reinforced
• contact clearance		1 000 V AC type of clearance: micro-disconnection
• pole - pole		2 500 V AC type of insulation: basic
Contact - coil distance		
• clearance		≥ 8 mm
• creepage		≥ 8 mm

General data

Operating / release time (typical values)		15 ms / 8 ms
Electrical life (number of cycles)		
• resistive AC1		> 3 x 10 ⁴ AC coils, 8 A, 250 V AC
		> 10 ⁴ DC coils, 8 A, 250 V AC
Mechanical life (cycles)		> 5 x 10 ⁶
Dimensions (L x W x H)		29 x 13 x 25,5 mm
Weight		16 g
Ambient temperature	• storage	-40...+85 °C
	• operating	AC: -40...+70 °C ❷ ❸ DC: -40...+85 °C ❷ ❸
Cover protection category		IP 40 PN-EN 60529
Environmental protection		RTII IEC 61810-7
Relative humidity		5...85%
Shock resistance		10 g
Vibration resistance	(NO/NC)	10 g / 5 g length direction: 10 g / 2 g ❹ 10...150 Hz
Solder bath temperature		max. 270 °C
Soldering time		max. 5 s

The data in bold type pertain to the standard versions of the relays. ❶ The data don't include the power of electronic indicating circuit when the relay picks-up. ❷ Operating temperature for relays mounted in sockets on 35 mm rail mount: -40...+55 °C. ❸ The distance between the mounting relays: min. 5 mm for versions AC; min. 1,5 mm for versions DC.

Coil data - DC voltage version

Table 1

Coil code	Rated voltage V DC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V DC ④	
				min. (at 23 °C)	max. (at 23 °C)
1012	12	360	± 10%	8,4	18,0
1024	24	1 440	± 10%	16,8	36,0
1048	48	5 760	± 15%	33,6	72,0
1110	110	25 200	± 15%	77,0	165,0

The data in bold type pertain to the standard versions of the relays.

④ The max. allowable voltage is coil overdrive voltage, it is the instantaneous max. voltage which the relay coil could endure in very short time.


Coil data - AC 500 Hz voltage version

Table 2


Coil code	Rated voltage V AC	Coil resistance at 20 °C Ω	Acceptable resistance	Coil operating range V AC 50 Hz	
				min. (at 23 °C)	max. (at 23 °C)
5024	24	350	± 10%	18,0	26,4
5115	115	8 100	± 15%	86,3	126,5
5230	230	32 500	± 15%	172,5	253,0

The data in bold type pertain to the standard versions of the relays.


Dimensions

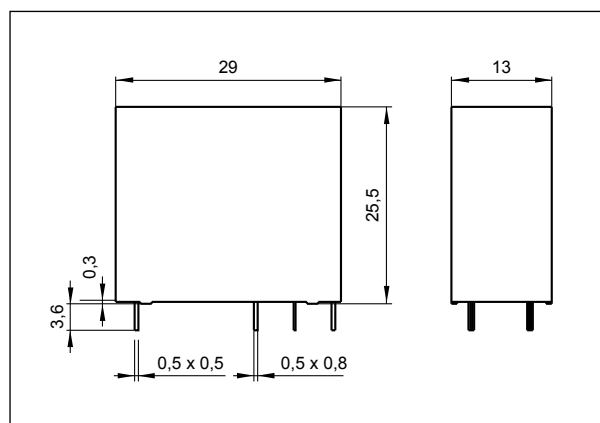

Pinout (solder side view)

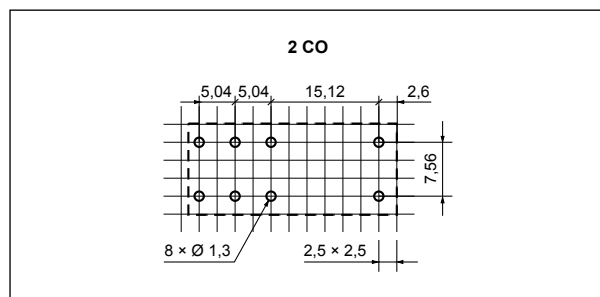


Connection diagram (pin side view)

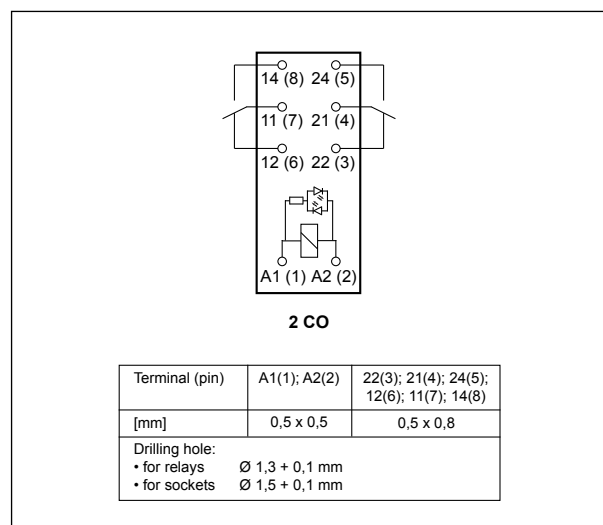


Electrical life at AC resistive load.
Switching frequency: 360 cycles/hour

Fig. 1

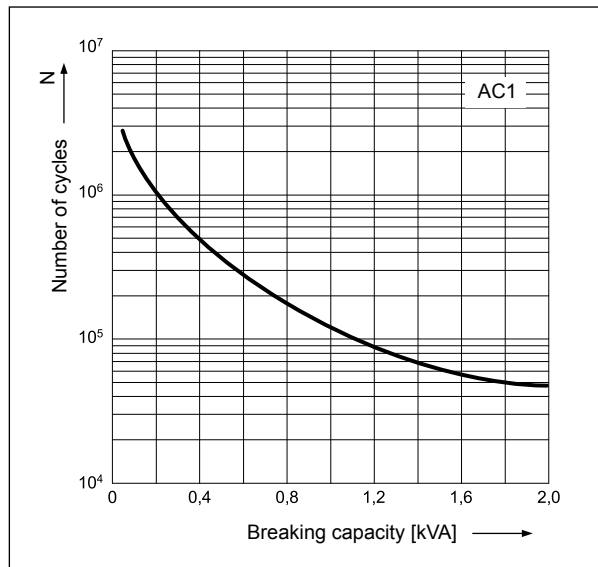


Max. AC 50 Hz resistive load breaking capacity

Fig. 2

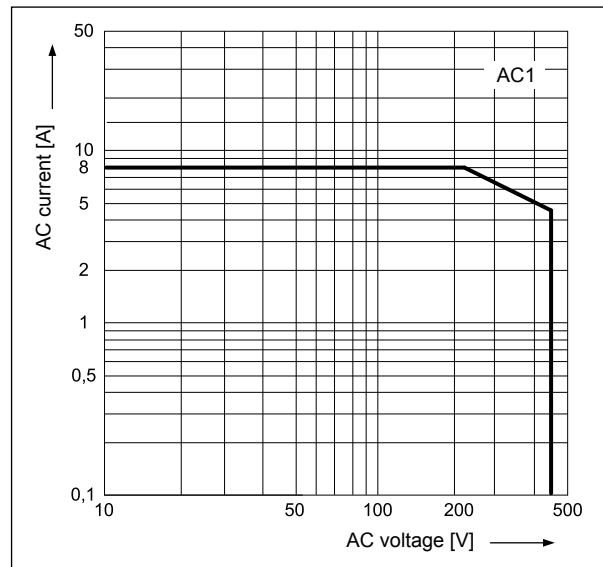


Coil operating range - DC

Fig. 3

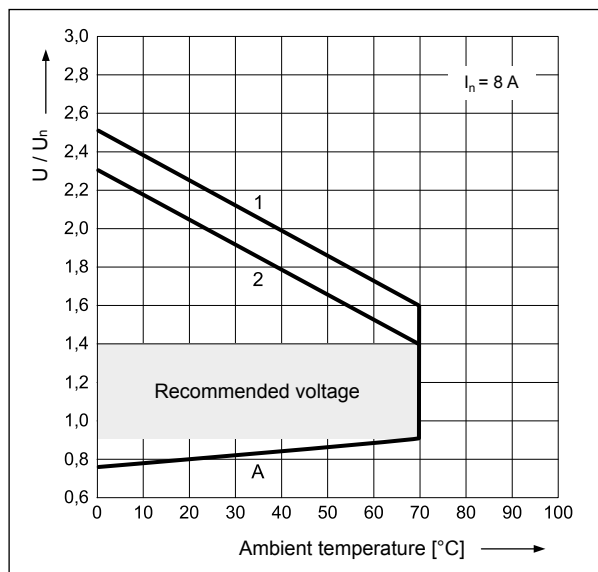

Coil operating range - AC 50 Hz

Fig. 4

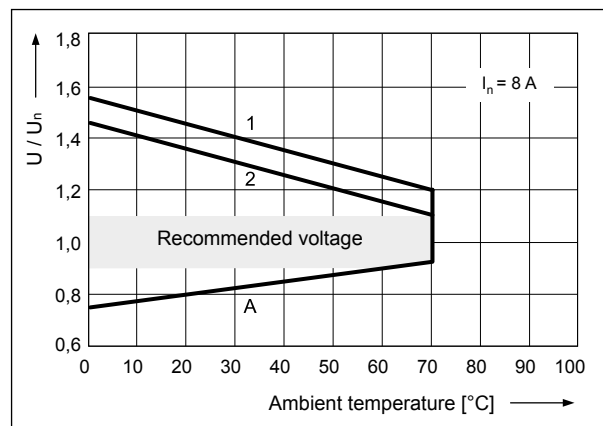

Description of Fig. 3 and 4

A - relations between make voltage and ambient temperature after initial coil heating up with $1,1 U_n$ at continues load of I_n on contacts. Make voltage is not higher than the value read on Y axis (multiplication of rated voltage).

1, 2 - values on Y axis represent allowed overvoltage on coil at certain ambient temperature and contact load:

1 - no load

2 - rated load

Note: the use of the relay at energizing voltage other than the rated voltage may lead to reduced electrical life. Energizing voltage exceeding the recommended range may damage the insulation of the relay coil.


Mounting

Relays **RMP84** ⑤ are designed for: • direct PCB mounting • spring terminals plug-in sockets **GZMB80** ⑥ with clip **GZMB80-0025**, 35 mm rail mount acc. to P-EN 60715. Signalling / protecting modules **type M...** are available with sockets (see page 7) • plug-in sockets for PCB mounting **EC 50** and **GD50** with clip **MH25-2**.

⑤ The distance between the mounting relays: min. 5 mm for versions AC; min. 1,5 mm for versions DC.

⑥ For sockets **GZMB80** - see page 5 (wire connection).

Ordering codes

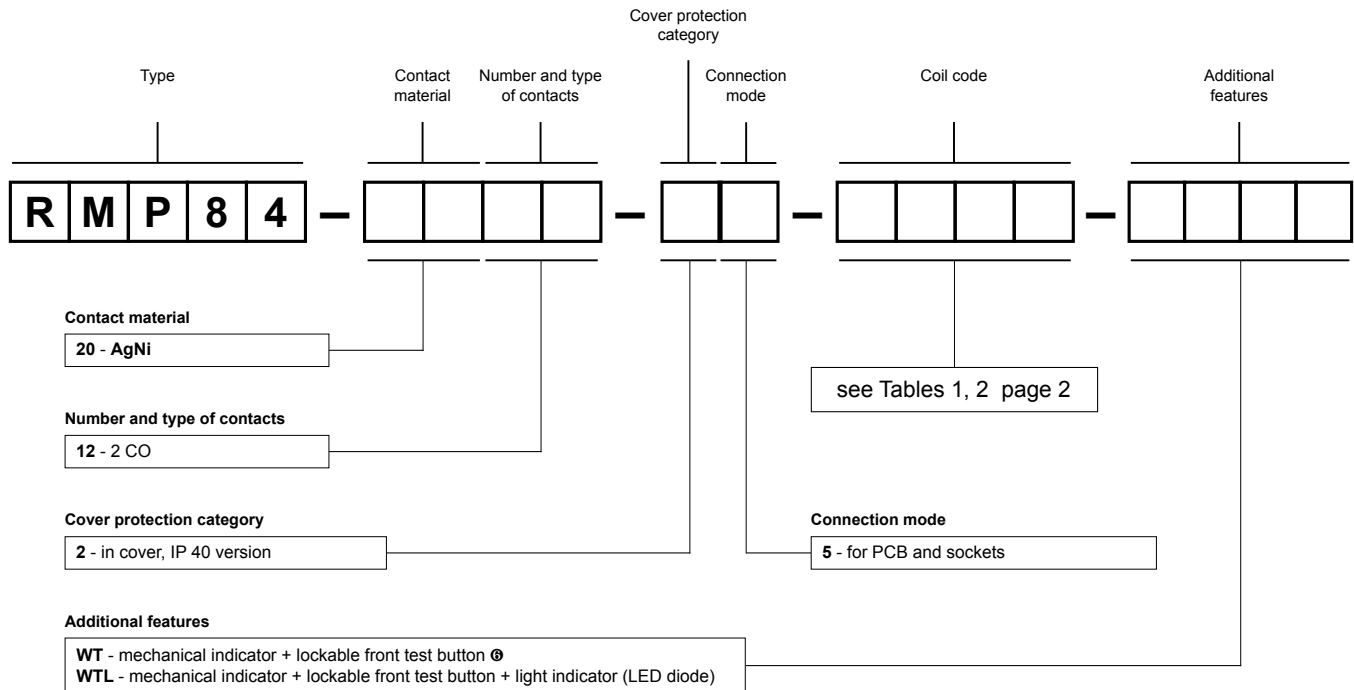

⑤ WT - standard features of relays

Test buttons type T RMP84, RMP85

Note:

Normally open contacts may be closed with the blocking function of the test button of the T type (it shall be bent by 90° to vertical position). When the button is drawn back, the normally open contacts are opened.



orange
- AC coils



blue
- DC coils

Examples of ordering code:

RMP84-2012-25-1024-WT

relay **RMP84**, for PCB and sockets, two changeover contacts, contact material AgNi, coil voltage 24 V DC, with mechanical indicator and lockable front test button, in cover IP 40

RMP84-2012-25-5230-WTL

relay **RMP84**, for PCB and sockets, two changeover contacts, contact material AgNi, coil voltage 230 V AC 50 Hz, with mechanical indicator and lockable front test button and light indicator (LED diode), in cover IP 40

Plug-in sockets and accessories


GZMB80

For RMP84, RMP85



Spring terminals
Max. cross section
of the cables:
1 x 0,2...1,5 mm²
(1 x 24...16 AWG)
Length of the cable
deinsulation: 9...11 mm

35 mm rail mount
acc. to PN-EN 60715
97 x 16 x 45,2(78) mm ②
Two poles, 5 mm pinout
10 A, 300 V AC

Connection diagrams ③



Dimensions

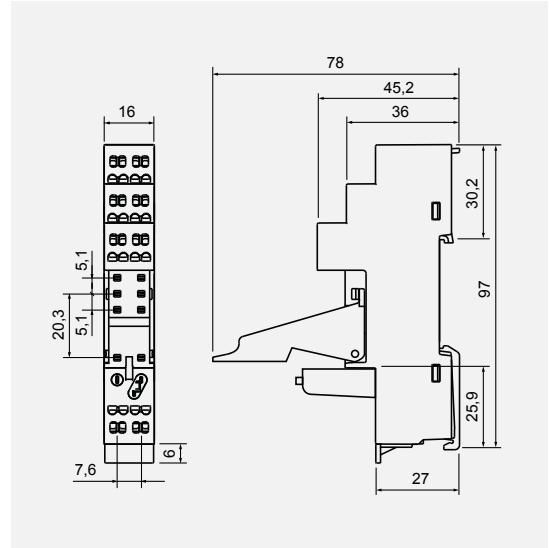


GZMB80-0025



TR



Module type M...

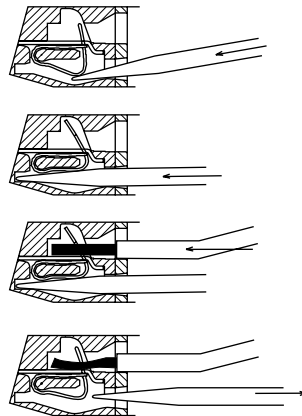

The drawings present the sequence of operations in course of inserting wires to the spring terminal, and the recommended screwdriver to be used for opening of case springs, comply with the DIN 5264 FORM „A“.

Accessories ①


Wire connection

① Mounting and sub-assemblies of accessories in the socket - see page 5. Signalling / protecting modules type M... - see page 7. ② In the bracket the height of socket with retainer / retractor clip is shown. ③ For RMP85: Loads above 10 A require bridging pairs of terminals: 11 with 21, 12 with 22, 14 with 24 - see page 2.


Mounting and sub-assemblies of the relay and accessories in the socket

Retainer / retractor clip

Signalling / protecting
module type M...



Electromagnetic
relay

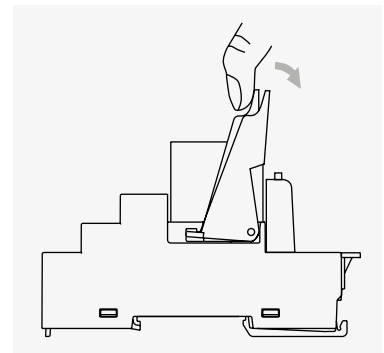


Removing the relay from the socket
with a retractor / retractor clip

Description plate



Spring terminals
plug-in socket

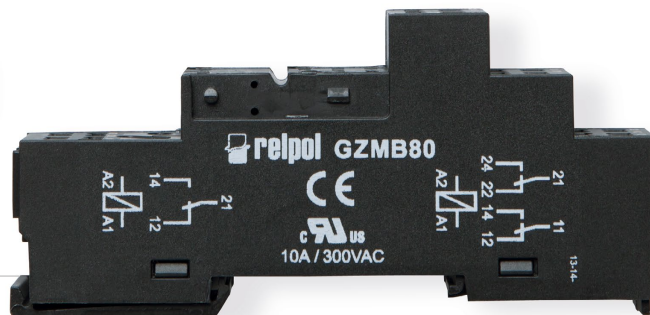


03.06.2015

Plug-in sockets and accessories


EC 50

For RMP84, RMP85

For PCB
31,3 x 12,7 x 9 mm
Two poles, 5 mm pinout
8 A, 300 V AC




Pinout



Accessories

MH25-2

Dimensions

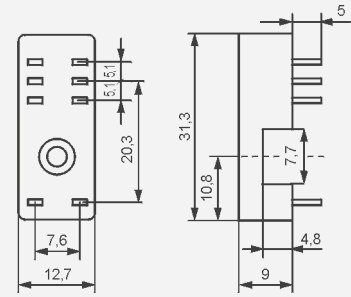


GD50

For RMP84, RMP85

For PCB
34,6 x 12,9 x 6,6 mm
Two poles, 5 mm pinout
8 A, 250 V AC




Pinout



Accessories


MH25-2

Dimensions

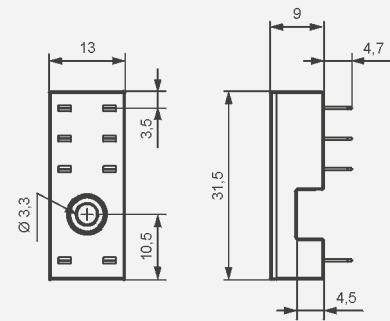

GZMB80, EC 50, GD50

Plug-in sockets
for relays
RMP84, RMP85

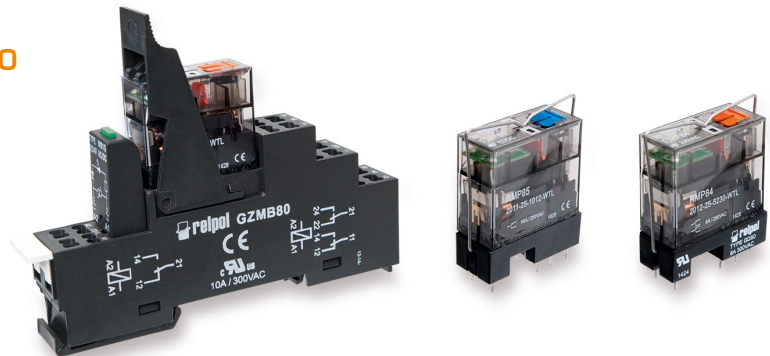

PRECAUTIONS:

1. Ensure that the parameters of the product described in its specification provide a safety margin for the appropriate operation of the device or system and never use the product in circumstances which exceed the parameters of the product. 2. Never touch any live parts of the device. 3. Ensure that the product has been connected correctly. An incorrect connection may cause malfunction, excessive heating or risk of fire. 4. In case of any risk of any serious material loss or death or injuries of humans or animals, the devices or systems shall be designed so to equip them with double safety system to guarantee their reliable operation.


03.06.2015

For sockets type:

GZT80, GZM80, GZS80, GZMB80, GZT92, GZM92, GZS92, ES 32,
GZT2, GZM2, GZMB2, GZT3, GZM3, GZT4, GZM4, GZMB4

Modules type M... are parallelly connected with relay coil.

Polarity P: -A1/+A2. Polarity N: +A1/-A2.



Modules type M...	Layout	Voltage	Type of module ① ②
Module D (polarization P) It limits overvoltage on DC coils.		6/230 V DC	M21P
Module D (polarization N) It limits overvoltage on DC coils.		6/230 V DC	M21N
Module LD (polarization P) It limits overvoltage on DC coils. Coil energizing indication.		6/24 V DC 24/60 V DC 110/230 V DC	M31R, M31G M32R, M32G M33R, M33G
Module LD (polarization N) It limits overvoltage on DC coils. Coil energizing indication.		6/24 V DC 24/60 V DC 110/230 V DC	M41R, M41G M42R, M42G M43R, M43G
Module RC It protects against EMC disturbance. It limits overvoltage.		6/24 V AC 24/60 V AC 110/240 V AC	M51 M52 M53
Module L Coil energizing indication.		6/24 V AC/DC 24/60 V AC/DC 110/230 V AC/DC	M61R, M61G M62R, M62G M63R, M63G
Module LV It limits overvoltage on AC and DC coils. Coil energizing indication.		6/24 V AC/DC 24/60 V AC/DC 110/230 V AC/DC	M91R, M91G M92R, M92G M93R, M93G
Module V It limits overvoltage on AC and DC coils. No indication.		24 V AC 130 V AC 230 V AC	M71 M72 M73
Module R It limits overvoltage on AC coils.		110/230 V AC	M103

① M...R - LED red, M...G - LED green

② When ordering modules indicate their color: gray or black.

